

# 2M IP Waterproof IR Camera V65D-Multi Function



**3G IR Led**

High Brightness


50,000 hours Service life

5% Luminous Decay Per Year



## Features

- Adopt HI processing chipset & CMOS image sensor
- H.264, AVI coding format
- Max. Support 1080P(1920x1080), 25f/s full real-time coding
- Built-in web to achieve configuration of video and network parameters
- Support dual-stream, mobile browsing
- Support Motion detection alarm, external PIR optional
- Support Two-way Voice Communication
- Support TF Card for data storage
- Support RS485 serial communication, support external PTZ control
- Wi-Fi/3G optional
- POE optional (IEEE 802.3.af)
- Support ONVIF2.4 standard network video transmitting protocol
- Matched with independent software, compatible with all types of large-scale platform

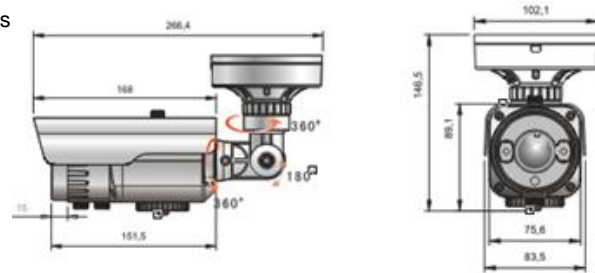

## Specification

<b>Model</b>	<b>CAM-MI207V65D-A</b>
Function	Multi function with audio I/O, Alarm I/O, USB (TF card) local record
Image Sensor	1/2.9" Sony COMS + HI3516C
Effective Pixels	2 Mega-pixel, 1080P (1920x1080)
Lens	2.8-12mm manual VF lens with ICR
IR Leds	3pcs 3rd Generation IR Leds
IR Distance	45-50M
Minimum Illumination	0 Lux When IR ON
Video Standard	<b>ONVIF 2.4</b>
FTP	Support Timing Video Upload, Timing Snapshot(software)

Compression Output Rate	32K~8Mbps adjustable
Video Compression	H.264, AVI
Concurrent Dual-stream	H.264/ AVI: 720P, SVGA
Frame Rate	25/30fps
Supporting Protocols	HTTP, TCP, RTSP , RTP, ICMP, UDP, IGMP V3 , RTCP, FTP, DNS, Bonjour, ARP, NTP
Privacy Mask	4 Zones
Motion Detection	YES
DNR	Auto (fixed)
Audio Port	1-CH input, 1-CH output
Audio Coding	G.711, AAC
Alarm Port	1-CH input, 1-CH output
Linakage Alarm	Video Loss/Motion Detection/PIR ( Set the area and sensitivity)
Data Storage	Support USB storage, Max support 64GB
Communication Port	1 RJ4510M/100M Adaptive Ethernet Port
E-mail Alarm	E-mail Notification, Alarm Sanpshot, Timing Snapshot (software)
White Balance	Auto (software)
Gain Control	Auto (software)
Image Adjustment	Saturation/Brightness/Contrast/Sharpness/Color adjustable (software)
Power Supply	DC12V
Power Consumption	<6W
Working Temperature	-20 °C~+50 °C
POE	Optional POE (IEEE 802.3.af)
WIFI	Optiona WIFI (802.11g/b)
3G	Optional 3G (WCDMA/CDMA2000)